

### ASIC/3-9520 Features

- 32-bit ARM7 processor
- 100Mb Ethernet and Optional wireless
- BACnet communication
- System Bus for ASI or BACnet MSTP communication
- Local Bus for ASI and/or Modbus Master RTU
- Compatible with ASI WebLink & ASI Data Server products
- USB Device Service Port
- USB Host
- Two-part screw terminal input, output and power connections
- 8 Universal Inputs
- 8 Binary Relay Output
- 4 Analog Outputs

The ASIC/3 Programmable System Controller represents a new generation of communicating distributed direct digital control for unitary equipment and building systems. The ASIC/3 controller is designed to be hardware compatible with the ASIC/2 Programmable controllers and offers expanded communication capability including USB, BACnet, Ethernet and Wireless.


The ASIC/3 provides energy management and control of a wide range of building systems including air handlers, chillers, cooling towers, boilers, pumps, lighting, etc. Applications range from autonomous control of retail stores, branch banks, and telephone company buildings to networked control of very large buildings. It has a switching power supply for AC operation and flash memory for program and data storage.

The controller is easily configured using ASI Visual Expert configuration software that links ready-made objects including scheduling, logic, PID control, alarming, optimum start, trending, run-time accumulation, and electrical demand management. The ASIC/3 has an on-board battery-backed calendar clock and allows special events, holidays, and schedules to be defined in advance. Configuration data is stored in non-volatile memory that is retained through power loss. The ASIC/3 controller has separate RS-485 system and local buses. The system bus is used to network multiple ASIC/3 and ASIC/2 controllers, or optionally the system bus can support BACnet MS/TP. The local bus can poll ASIC/1 terminal controllers and make control decisions based on the data received. No central system is needed to supervise the controller. The local bus can also support Modbus Master RTU. Red and green LEDs indicate the controller's receive and transmit communications.

The ASIC/3 can operate as part of a larger communicating control network. The ASIC/3 offers Ethernet communication and alarm notification via wired 10/100 Mbps connection or optional WiFi module. The ASIC/3 also features a full-speed 12 Mbps USB Device connection for service in the field. The RS-485 connections support baud rates up to 57,600 bps, and standard BACnet MSTP baud rates up to 76,800 bps are also supported.

The controller can send notify messages the system bus to a computer running ASI Weblink software. Temperatures, setpoints, and other controller data may be easily reported to ASI WebLink or other OPC client software.

The eight 24 Vac relay outputs are ideal for driving contactors and starters. The eight analog outputs are used for modulated actuators, electronic-pneumatic transducers, variable speed drives and other analog signal devices. The eight universal inputs may be used for counting pulses, for reading thermistors and contact closures directly, and for reading 4 to 20 mA, 0 to 5 Vdc or 1 to 5 Vdc input signals.

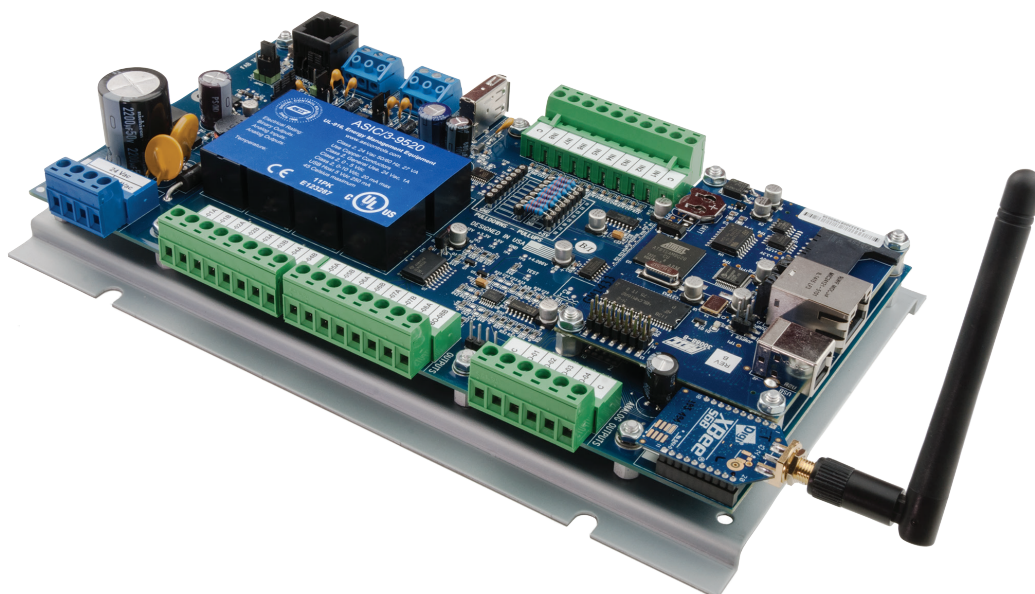

## Specifications

### Control Power

Supply Voltage: 24 Vac +/- 15%, 50/60 Hz  
 Power Consumption: 27 VA (plus loads)  
 Protection: PS1, Polyswitch, MOV  
 Connection: 2-part screw terminal  
 Indication: Red LED

### Binary Outputs 8

Type: Form "A" Relay SPST N.O.Dry Contacts  
 Voltage Rating: Class 2, 24 Vac or 24 Vdc  
 Current Rating: 1 A General Use  
 Connection: 2-part screw terminal  
 Indication: Red LED, Binary Outputs

### Analog Outputs 4

Type: Analog 0-10Vdc, 20 mA  
 Resolution: 1% full scale  
 Protection: TVS, 10 V, 600W peak  
 Connection: 2-part screw terminal

### Inputs 8

Type: Universal Analog/Binary  
 Range: 0 to 5 Vdc, 12-bit, 0.1% full scale  
 Connection: 2-part screw terminal.

### RS-485 Communications (2)

Format: RS-485, optional 120 ohm Termination  
 Baud Rate: Up to 57,600 bps  
 Protection: 500 mW-s TVS with 100 mA Polyswitch  
 Maximum Length: 4000 ft (1.2 km) RS-485  
 Connection: 3 Position, screw terminals  
 Indication: Red LED Receive, Green LED Transmit

### System Bus Communication

Address Range: 1 to 65535  
 Maximum Size: Up to 255 devices with repeaters  
 Alternate Protocol: BACnet MS/TP 76,800 bps

### Local Bus Communication

ASI Address Range: 1 to 65535 except for group and global addresses  
 Maximum Size: Up to 64 devices with repeaters  
 Alternate Protocol: Modbus Master RTU

### Ethernet Networking

Communication: UDP/IP or TCP/IP; auto-sense  
 10 Mbit/s or 100 Mbit/s  
 Requires 100 MHz Ferrite Core on Ethernet cable.  
 Optional Wireless: XBee Module Ready

### Other



Indication: LEDs, 1 Power, 2 Rx/Tx, 8 Output  
 Dimensions: 5.5" x 9.2" x 2.0"  
 (140mm x 234 mm x 51 mm)  
 Weight: 1.6 lbm (0.7 kg)

### Environmental

Operating: 45 °C max (+113 °F)  
 10 to 95% RH non-condensing  
 Storage: -37 to 80 °C (-35 to +180 °F)  
 5 to 95% RH non-condensing

### UL Listing

UL-916 Open Energy Management Equipment  
 C22.2 No. 205-M1983 Canada Signal Equipment  
 File E123287 (PAZX, PAZX7) Class 2 Device  
 Meets CE Requirements. per EN61326-1  
 FCC Part B Class A (CISPR11)

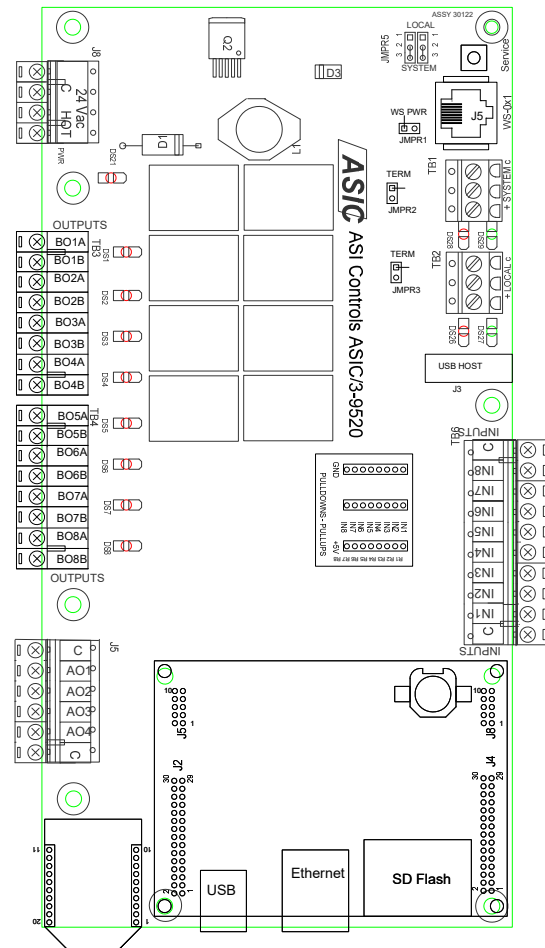

How to Order:	Order Number
Programmable Unitary Controller	ASIC/3-9520

Software & Documentation:	Order Number
ASI Expert Configuration Software	ASI Expert
ASIC/3-9520 Users' Guide	9520 User